

Info generali

Tecnico - Incasso


Indoor wall recessed path light with integrated LED sources and direct asymmetrical light emission



Ean	8021696249834
Articolo	WALKY-3 FI
Garanzia	5 years
Peso lordo	0.61 kg
Volume	0.00091 m ³

Info tecniche e installative

Peso netto	0.58 kg
Classe di isolamento	II
Grado di protezione	IP20
Temperatura d'esercizio	0° ~ +40 °C
Dimmer	Non-dimmable, On-Off
Alimentazione	220-240 V AC 50/60 Hz
Alimentatore	Separate, included
	YES (by qualified operators only), electronic
Specifiche per l'incasso	103 x 103 - h. ≥ 100 , 9-15

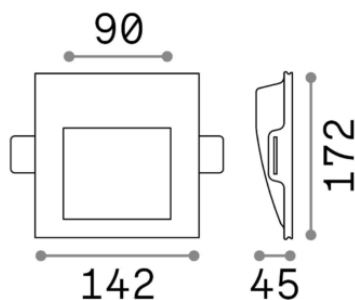

Info sorgente e prestazionali

Sorgente integrata	Integrated LED module
Sorgente sostituibile	YES (by qualified operators only)
Potenza	1W
Emissione	Direct Asymmetrical
Consumo massimo	max 1 W
Caratteristiche LED	LED SMD
CCT	3000 K
Durata LED (t. 25°C)	50000 h
CRI	> 90
SDCM	-
Fascio luminoso	-
Flusso sorgente	55 lm
Flusso utile	40 lm
Potenza in stand-by	< 0.50